




Modulární rozpěrné traverzy

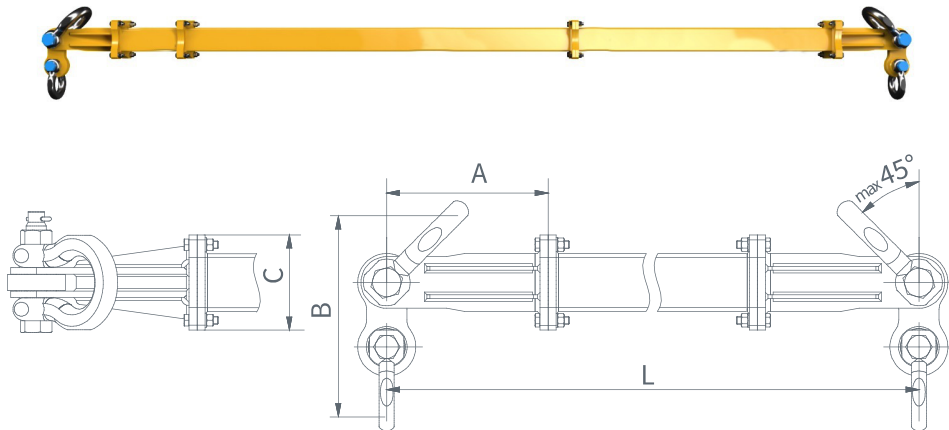

	TS 170	TS 110	TS 50	TS 34	TS 19	TS 12	TS 6
Spojovací členů (Maximální povolený počet spojovacích prvků mezi koncovými prvky je 5)	6,0m (744kg) 4,0m (532kg) 3,0m (426kg) 2,0m (320kg) 1,0m (214kg) 0,5m (161kg)	6,0m (863kg) 4,0m (258kg) 3,0m (205kg) 2,0m (152kg) 1,0m (100kg) 0,5m (73kg)	4,0m (198kg) 3,0m (156kg) 2,0m (113kg) 1,0m (70kg) 0,5m (49kg)	4,0m (137kg) 3,0m (107kg) 2,0m (77kg) 1,0m (47kg) 0,5m (32kg)	4,0m (65kg) 3,0m (50kg) 2,0m (35,5kg) 1,0m (21kg) 0,5m (13,5kg) 0,25m (10kg)	2,0m (30kg) 1,0m (17kg) 0,5m (10kg) 0,25m (7kg)	2,0m (22kg) 1,0m (12kg) 0,5m (7kg) 0,25m (4kg)
Koncoví členové	2x1,0m (2x281kg)	2x0,5m (2x84kg)	2x0,5m (2x53kg)	2x0,5m (2x35kg)	2x0,25m (2x9,5kg)	2x0,25m (2x6,5kg)	2x0,25m (2x4kg)
Spojovací materiál (hmotnost)	2x95 kg	2x43 kg	2x20 kg	2x11 kg	2x5 kg	2x2,5 kg	2x0,8 kg
Horní třmen	2xBX120 (2x111kg)	2xBX85 (2x64kg)	2xBX42,5 (2x32kg)	2xBX25 (2x14kg)	2xBX17 (2x9kg)	2xBX9,5 (2x3,5kg)	2xBX4,75 (2x1,1kg)
Spodní okovy	2xBX85 (2x64kg)	2xBX55 (2x39kg)	2xBX25 (2x14kg)	2xBX17 (2x9kg)	2xBX9,5 (2x3,5kg)	2xBX6,5 (2x1,5kg)	2xBX3,25 (2x0,75kg)
Rozměry							
A [mm]	1000	500	500	500	250	250	250
B _{30°} [mm]	1019	805	618	493	404	312	203
B _{45°} [mm]	953	748	579	461	378	293	190
C [mm]	490	350	295	260	178	148	120

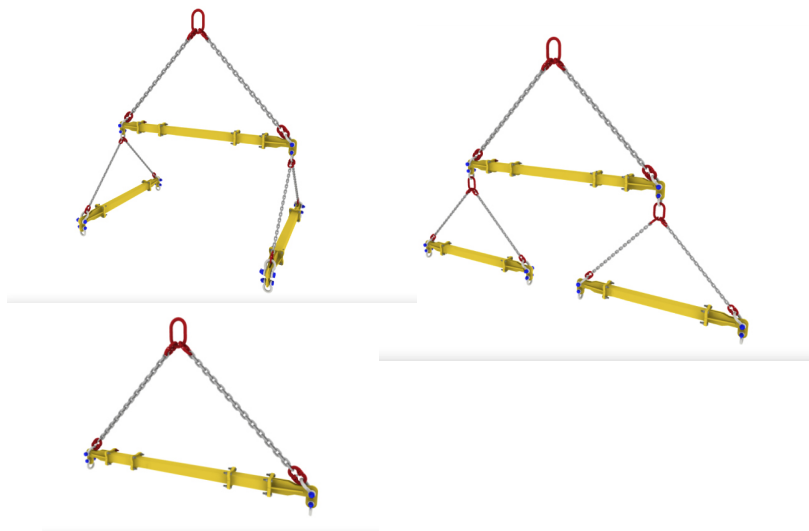

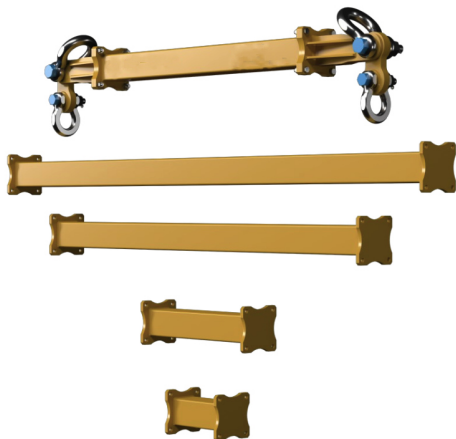

Tabulka nosnosti (WLL) a hmotnosti (hm.)

Délka L [m]	TM 170			TM 110			TM 50			TM 34			TM 19			TM 12			TM 6		
	WLL [t]	hm.	max[kg]	WLL [t]	hm.	max[kg]	WLL [t]	hm.	max[kg]	WLL [t]	hm.	max[kg]	WLL [t]	hm.	max[kg]	WLL [t]	hm.	max[kg]	WLL [t]	hm.	max[kg]
	45°	30°		45°	30°		45°	30°		45°	30°		45°	30°		45°	30°		45°	30°	
0,5	—	—	—	—	—	—	—	—	—	—	—	—	19	19	54	12	12	25	6	6	14
1,0	—	—	—	110	110	460	50	50	238	34	34	138	19	19	74	12	12	42	6	6	23
1,5	—	—	—	110	110	533	50	50	287	34	34	170	19	19	94	12	12	56	6	6	32
2,0	170	170	1102	110	110	606	50	50	336	34	34	202	19	19	108	12	12	66	6	6	39
2,5	170	170	1263	110	110	679	50	50	385	34	34	234	19	19	115	12	12	72	6	6	44
3,0	170	170	1424	110	110	752	50	50	434	34	34	266	19	19	122	12	12	78	6	6	49
3,5	170	170	1585	110	110	825	50	50	483	34	34	298	19	19	129	12	12	85	6	6	54
4,0	170	170	1746	110	110	852	50	50	504	34	34	313	15	19	137	11	12	92	5	6	59
4,5	170	170	1907	108	110	879	50	50	525	34	34	328	12	19	144	9	12	99	4	6	64
5,0	170	170	1960	103	110	906	50	50	546	34	34	343	10	17	152	7	12	106	3	5	69
5,5	170	170	2013	96	110	933	50	50	567	34	34	358	8	14	159	6	10	113			
6,0	170	170	2066	89	110	960	50	50	588	34	34	373	7	12	166	5	9	119			
6,5	170	170	2119	82	110	985	50	50	610	30	34	388	5,5	10	174	4	7	126			
7,0	170	170	2172	74	110	1012	45	50	631	26	34	403	5	8	181	3,5	6	132			
7,5	170	170	2225	67	110	1037	38	50	653	23	34	418	4	7	188						
8,0	170	170	2278	60	105	1064	35	50	674	20	34	433	3,5	6	195						
8,5	170	170	2331	54	94	1089	31	50	696	18	31	448	3	5	203						
9,0	170	170	2384	49	85	1116	27	48	717	16	27	463	2,5	4,5	210						
9,5	170	170	2437	44	77	1141	24	43	739	14	24	478									
10,0	170	170	2490	40	69	1168	22	38	760	12	22	493									
10,5	160	170	2543	36	62	1195	20	34	781	11	19	508									
11,0	150	170	2596	32	56	1222	18	31	802	10	17	523									
11,5	141	170	2649	29	51	1247	16	28	823	9	16	538									
12,0	132	170	2702	27	47	1274	14	25	844	8	14	553									
12,5	123	170	2755	24	42	1301	13	23	866	7	13	568									
13,0	115	170	2808	22	39	1328	12	21	887	6,5	11	583									
13,5	108	170	2861	20	35	1353	11	19	909	6	10	598									
14,0	100	170	2914	18	32	1380	10	17	930	5,5	9	613									
14,5	94	162	2967	17	30	1407	9	16	951												
15,0	88	152	3020	15	27	1434	8	14	971												
15,5	82	142	3073	14	25	1459	7,5	13	994												
16,0	76	133	3126	13	23	1486	7	12	1015												
16,5	71	124	3179	12	21	1512															
17,0	67	116	3232	11	19	1539															
17,5	63	109	3285	10	18	1565															
18,0	59	102	3338	9,5	16	1592															
18,5	55	96	3391	9	15	1617															
19,0	52	90	3444	8	14	1644															
19,5	48	84	3497	7,5	13	1670															
20,0	45	79	3550	7	12	1697															
20,5	43	74	3603																		
21,0	40	70	3656																		
21,5	38	66	3709																		
22,0	35	62	3762																		
22,5	33	58	3815																		
23,0	31	55	3868																		
23,5	30	52	3921																		
24,0	28	49	3974																		

- Nosnost traverzy závisí na délce traverzy a úhlu vazáku, na kterém je traverza zavěšena
- Maximální počet spojovacích článků, umístěných mezi koncovými články je **5**

